

**60°/60° Narrow Beam Directional Antenna [698-960MHz, 1695-2700 MHz]**

# EXTENT™ D5778i

**Description:**

- Single-sector MIMO antenna for high capacity venues.
- 60°/60° dual-polarized beam width covering 698-960MHz and 1695-2700MHz.



698-960MHz, 1695-2700 MHz, Directional Panel Antenna

**Electrical Specifications**

Frequency Band [MHz]	698-790	790-960	1695-1780	1780-1990	1990-2180	2305-2360	2360-2700
Input Connector Type	2x 7-16(F) DIN or 4.3-10(f) DIN						
Isolation (typ.)	-25 dB						
VSWR/Return Loss	<1.5:1 / 14.0 dB						
Impedance	50 Ω						
Polarization	Dual slant 45° (±45°)						
Horizontal Beamwidth	59°	60°	55°	60°	63°	68°	60°
Vertical Beamwidth	67°	62°	70°	68°	62°	50°	45°
Max. Gain	8.8 dBi	8.6 dBi	8.8 dBi	8.6 dBi	8.8 dBi	9.4 dBi	9.5 dBi
Avg. Gain	8.1 dBi	8.0 dBi	8.2 dBi	8.1 dBi	8.2 dBi	8.4 dBi	8.9 dBi
Front to Back	20 dB			25 dB			
Max Power / Port	150 Watts			125 Watts			
PIM @ 2x43 dBm	<-153 dBc						


**Mechanical Specifications**

Operating Temperature	-40° to 158°F (-40° to +70°C)
Antenna Weight	5.73 lbs (2.6 kg)
Antenna Depth	5.0" (127 mm)
Antenna Width	13.2" (335mm)
Antenna Height	13.8" (350mm)
Radome Material	PC/ABS
RoHS	Compliant
Radome Color	RAL 9016 (white)*
Ingress Protection	Outdoor (IP65)
Wind Survival Rating	170 mph (274 km/h)
Shipping Dimensions	15.3"x15.3"x7.8" / 390x390x200mm
Shipping Weight (Gross Weight)	8.4 lbs (3.8 kg)



\* Radome can be painted with recommended paint "Krylon fusion for plastic"

**Additional Technical Information**

**Antenna Patterns**

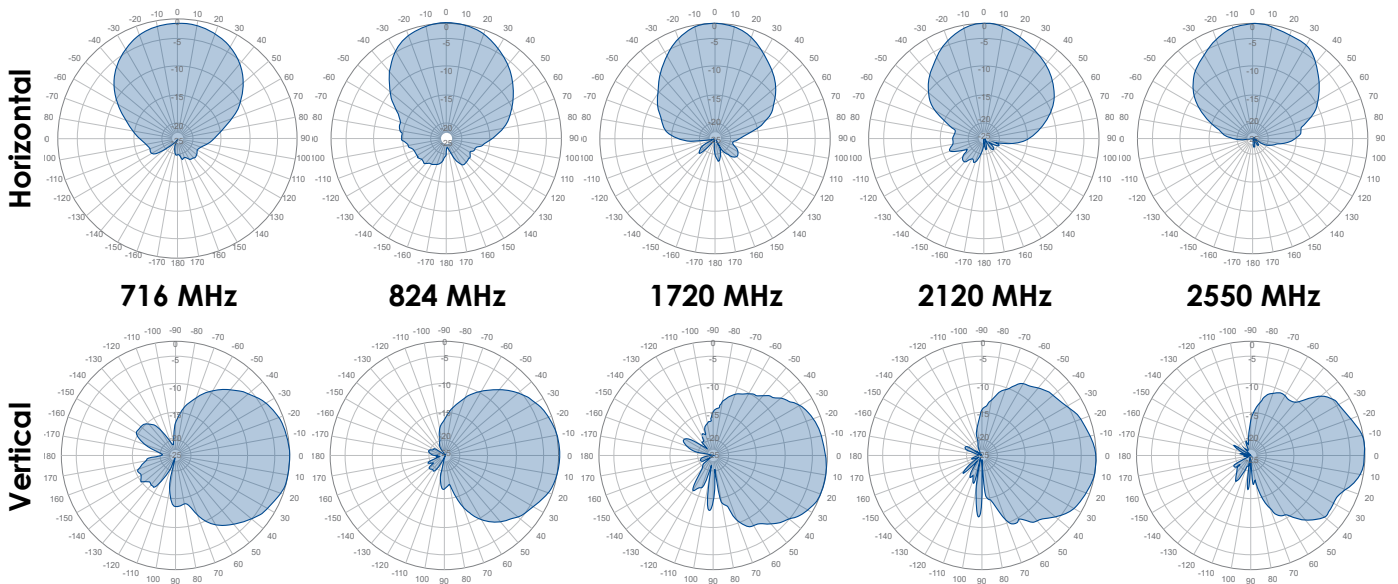

**Part Numbers, Ordering Options and Accessories**

Description	Part Number:
<b>Antenna with 2x 7-16 DIN (F) Connectors</b>	04119261-05778-1
<b>Antenna with 2x 4.3-10 DIN (F) Connectors</b>	04127261-05778-1
Mounting Bracket(s)	Part Number:
<p><b>1 or 2 Axis Pole/Wall Mounting Bracket (wind speed up to 170 mph)</b></p> <p>The mounting bracket allows wall and pole mounting with flexible and continuous antenna adjustment in the horizontal and vertical plane.</p>	 <p>62-45-09 <b>[Included]</b></p>
<p><b>2 Axis Pole/Wall Mounting Bracket (wind speed up to 170 mph)</b></p> <p>This mounting bracket offers an easy installation solution of mounting all Galtronics' Stadium Antennas to either a pole or a wall.</p>	 <p>62-28-09 <b>[Optional]</b></p>

**Mating Male Connector Torque:**  
7-16: 18.4 ft-lb (25 Nm)  
4.3-10: 3.7 ft-lb (5 Nm)