


2' 12-Port Quasi-Omni Pattern Canister Antenna [698-896, 1695-2690, 3300-4200 and 5150-5925 MHz]

GQ2412-B6613

Description:

- Quasi-Omni Pattern Canister Antenna for Outdoor DAS and Small Cells
- 2x ports for Low Band 698-896 MHz
- 4x ports for AWS/PCS/WCS Band 1695-2690 MHz
- 4x ports for C-Band 3300-4200 MHz
- 2x ports for U-NII Band 5150-5925 MHz*



698-896, 1695-2690, 3300-4200 and 5150-5925 MHz
12-Port Quasi-Omni Pattern Canister Antenna

*Compliant to 789033 D02 General U-NII Test Procedures New Rules v01r04: The antenna meets current U-NII-1 requirements for gain and upper side-lobe performance. Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Sub-part E

Electrical Specifications

Frequency Band [MHz]	698-896	1695-2200	2305-2360	2496-2690	3300-3550	3550-3700	3700-4200	5150-5925
Input Connector Type	2x 4.3-10(F)	4x 4.3-10(F)			4x 4.3-10(F)			2x 4.3-10(F)
Isolation (min.)	25 dB	20 dB	25 dB		20 dB			25 dB
VSWR (max.) /RL (min.)	1.5:1 / 14.0 dB							
Impedance	50 Ω							
Polarization	Dual slant 45° (±45°)							
Horizontal Beamwidth	Omni (360°)							
Vertical Beamwidth	35.7°	22.4°	19.5°	17.0°	25.5°	26.3°	23.1°	22.5°
Gain (max.)	6.3 dBi	9.5 dBi	9.6 dBi	9.7 dBi	8.4 dBi	8.8 dBi	8.4 dBi	5.5 dBi
Gain (avg.)	5.6 dBi	8.1 dBi	8.6 dBi	8.8 dBi	7.6 dBi	7.8 dBi	7.6 dBi	4.6 dBi
Downtilt	0° Fixed							
Max Power / Port	100 Watts				100 Watts			1 Watt
PIM @ 2x43 dBm	<-153 dBc				N/A			N/A


Mechanical Specifications

Operating Temperature	-40° to 158°F (-40° to +70°C)
Antenna Weight	22.7 lbs (10.3 kg)
Antenna Diameter	14.5" (369 mm)
Antenna Height	24.0" (609.6 mm)
Radome Material	ASA
Radome Color	Gray, Brown and Black
Ingress Protection	Outdoor (IP65)
Wind Survival Rating	150 mph (241 km/h)


RFD#: B6613 ; Revision: R3 ; Release Date: November 23, 2021;

2D Antenna Patterns


Horizontal




776 MHz



2200 MHz







2305 MHz




2523 MHz


Vertical




Horizontal




3450 MHz



3600 MHz







3960 MHz



5225 MHz


Vertical



RFD#: B6613 ; Revision: R3 ; Release Date: November 23, 2021;


Additional Technical Information

Mechanical Dimensions

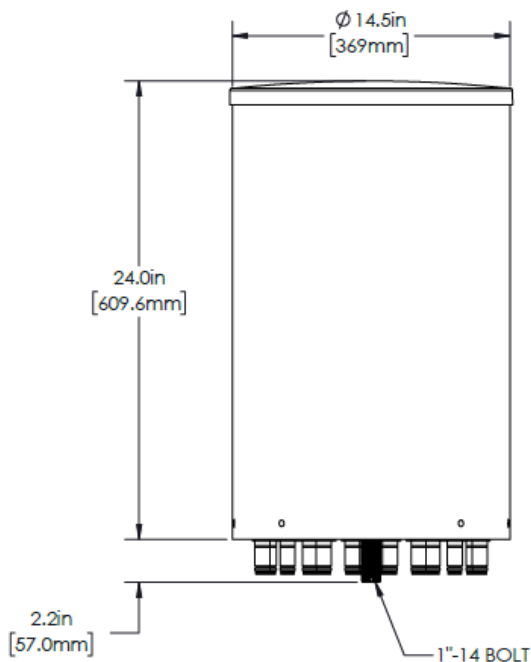

Mating Connector Torque:

4.3-10: 3.7 ft-lb (5 Nm)

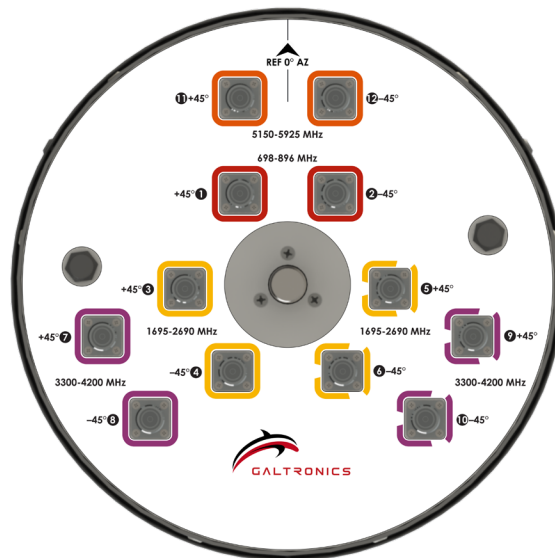

Part Numbers & Ordering Options


Description	Color	Mounting Kit	Part Number
Quasi-Omni Pattern Canister Antenna with 12x 4.3/10(F) Connectors	Gray	Including MK-06761 mounting kit assembly	GQ2412-B6613-1xx
	Brown		GQ2412-B6613-6xx
	Black		GQ2412-B6613-Bxx

Mounting Brackets & Optional Accessories

Mounting Kit Assembly, Canister, Pole Top (wind speed of 150 mph)

The assembly kit includes a 1" Mount Rod Adapter (MK-06678: universal interface for pole top installation) and a Pole Top Mounting Bracket (MK-06679: a bracket base attached directly to wood, metal and cement poles).

Note: 1" Rod Adapter (MK-06678) and Pole Top Mounting Bracket (MK-06679) may be ordered separately.



MK-06761

Mating Connector Torque:

4.3-10: 3.7 ft-lb (5 Nm)

Copyright © 2021 – Galtronics Corporation Ltd.

Proprietary Information. All rights reserved. Galtronics reserves the right to modify or amend any antenna or specification without prior notice.