

60"x2" 10-Port Outdoor Whip Antenna with 0° Fixed Tilt [617-896, 1695-2690 and 3300-4200 MHz]

GO6010-08243



Description:

- Outdoor whip antenna for DAS and Small Cells
- 2x port omni with fixed 0° EDT covering 617-896 MHz band
- 4x port omni with fixed 0° EDT covering 1695-2690 MHz band
- 4x port omni with fixed 0° EDT covering 3300-4200 MHz band
- Gain enhancement for C-band to align coverage with Low-band and Mid-band

Electrical Specifications

Frequency Band [MHz]	617-698	698-806	806-896	1695-2200	2305-2360	2496-2690	3300-3550	3550-3700	3700-4200
Input Connector Type	2x NEX10(F) Pigtail			4x NEX10(F)			4x NEX10(F)		
Port Designator	P1 - P2			P3 - P6			P7 - P10		
Port to Port Isolation (dB)	13	15	20	20					
VSWR / RL (dB)	1.92:1 / 10.0			1.5:1 / 14.0					
Polarization	Vertical						Dual Slant (+/-45°)		
Horizontal Beamwidth (°)	360								
Vertical Beamwidth (°)	78	88	80	52	42	41	33	29	28
Gain (dBi, max.)	5.7	4.3	4.0	5.3	5.6	6.2	6.3	6.2	7.6
Gain (dBi, avg.)	4.0	3.3	3.4	3.9	4.9	5.4	5.4	5.5	5.6
Downtilt (°)	0 fixed								
Max Power / Port (W)	100			70			50		
PIM @ 2x43 dBm (dBc)	-153						-145		
Impedance (Ω)	50								


Mechanical Specifications

Operating Temperature	-40° to 158°F (-40° to 70°C)
Antenna Weight	5.73 lbs (2.6 kg)
Antenna Bracket Weight (MK-06766)	1.7 lbs (0.78 kg)
Antenna Bracket Weight (MK-06696)	4.1 lbs (1.9 kg)
Antenna Diameter	2.0" (51.5 mm)
Antenna Height	60.0" (1524 mm)
Input Connector Type	2x NEX10(F) Pigtail and 8x rigid NEX10(F) connectors
Radome Material	Fiberglass
Environment Rating	Outdoor
Wind Survival Rating	150 mph (241 km/h)


Copyright © 2026 – Galtronics Corporation Ltd.

Proprietary Information. All rights reserved. Galtronics reserves the right to modify or amend any antenna or specification without prior notice.


2D Antenna Patterns

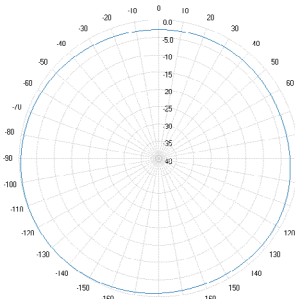


637 MHz

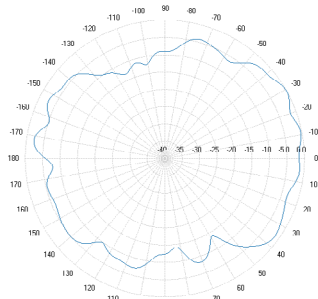


780 MHz




824 MHz




1755 MHz




1980 MHz




2345 MHz




2599 MHz




3400 MHz




3650 MHz



3920 MHz



Antenna Outline & Port Designation Details

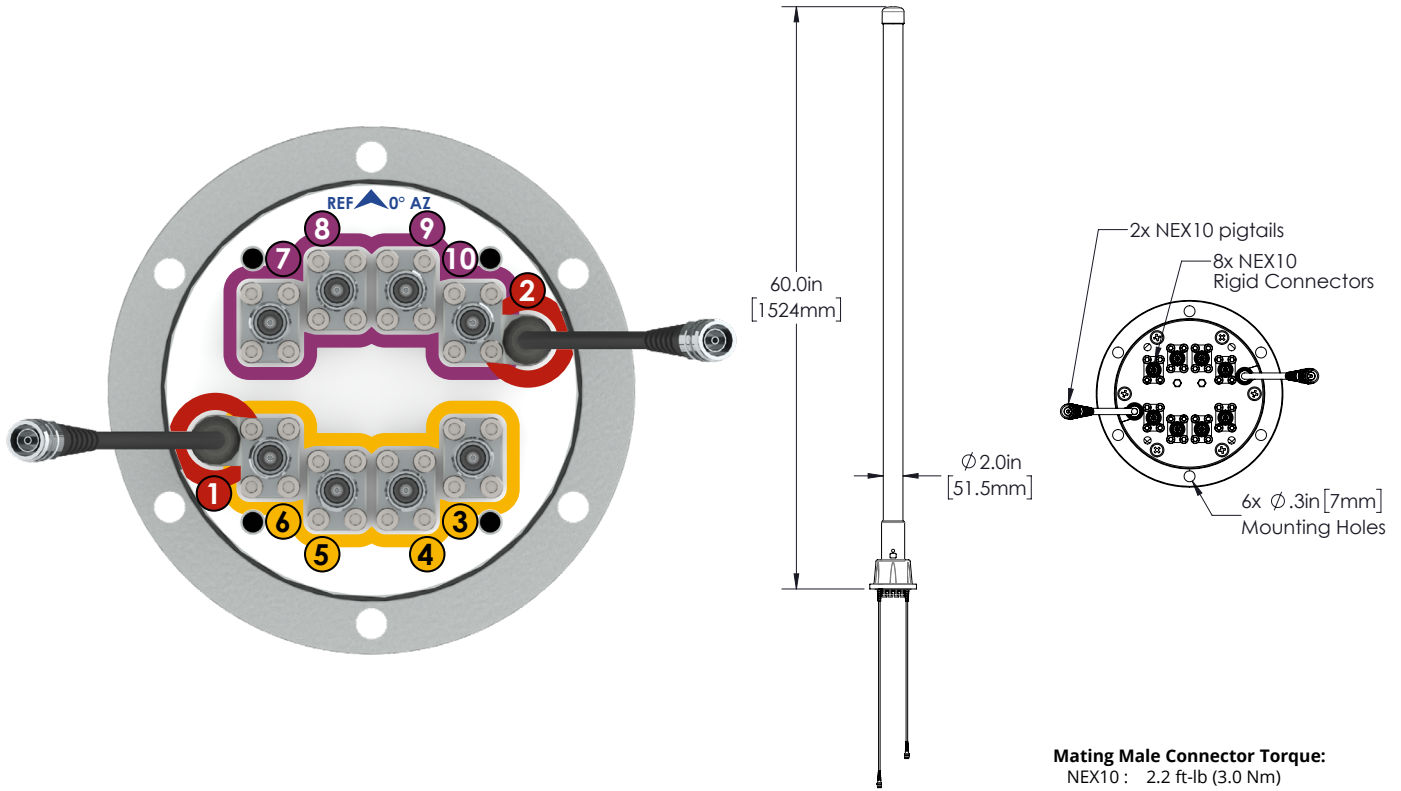

Part Numbers & Ordering Options

Description	Color	Mounting Kit	Part Number
10-Port outdoor whip antenna with 2x NEX10(F) pigtail and 8 rigid NEX10(F) connectors	Light Gray 26373 (Fed Std 595)	Includes MK-06766 Spacer Collar Light Gary 26373 (Fed Std 595)	GO6010-08243-122

Mounting Brackets and Optional Accessories

Description	Part Number
Antenna Spacer Collar [Included] Note: MK-06766 can also be ordered separately	 MK-06766 
Side Mount Bracket [Optional]	 MK-06696 

RFD#: 8243; Revision: R2; Release Date: January 26, 2026;